

BEST AVAILABLE COPY

PCT/GB 2004 / 0 0 5 1 1 6 ,



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

REC'D 07 JAN 2005

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gersey

Dated

13 December 2004

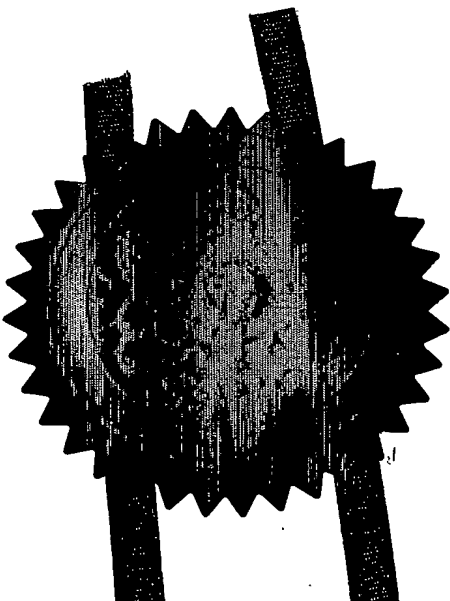

Patents Act 1977
(1977)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
G
09 JUN 2004
NEWPORT



09 JUN 04 E902129-3 002819
P01/7700 0.00-0412784.1 CHEQUE

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

C739/W

2. Patent application number

(The Patent Office will fill in this part)

0412784.1

09 JUN 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

UNOVA U.K. Limited
26 Temple Street
Aylesbury
Buckinghamshire
HP20 2RQ

Patents ADP number (if you know it)

860195 7001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Improved grinding wheel spindle

5. Name of your agent (if you have one)

Keith W Nash & Co

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

90-92 Regent Street
Cambridge
CB2 1DP

Patents ADP number (if you know it)

1206001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
UK	0411522.6	22/05/04

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes a)

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

8

Claim(s)

3

Abstract

1

Drawing(s)

3 + 3 *th*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

X

Request for preliminary examination and search (*Patents Form 9/77*)

X

Request for substantive examination (*Patents Form 10/77*)

X

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 8.6.04

Keith W Nash & Co, Agents

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr Nash (01223) 355477

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

1

C739/W

Title: Improved grinding wheel spindle

Invention

This invention concerns grinding wheel spindles

Background

Automotive engine designers have realised that a better performing engine can be achieved by modification of the camshaft lift profile. Thus the profile of that part of the cam which controls the actual opening and closing of the valve, is modified from a conventional flat or convex shape so as to possess a concave region. A camshaft of this type is known as having a re-entrant profile.

This type of profile manifests itself on the cam lobe as a depression in the lift/closure flank of the cam, which can only be produced with a grinding wheel whose external radius is the same as, or more preferably smaller than, the minimum radius of the cam form. Non re-entrant cam profiles can of course be ground with wheels of unlimited radius.

A number of issues are faced when designing grinding wheel spindles for this task;

1. Due to the small grinding wheel diameter, the spindle speed has to be proportionally higher to maintain a satisfactory wheel surface speed.
2. The grinding wheel must be capable of reaching the base circle diameter of each cam lobe, and in particular a cam lobe at the end of a camshaft remote from the spindle housing, while allowing the tips of other lobes to rotate clear of the spindle body is

situated parallel to the camshaft. Therefore the spindle shaft is restricted in diameter to allow this clearance.

It is therefore necessary for the rotating shaft to be long, to be of small diameter and to be able to run at high rotational speeds.

Spindle design considerations dictate that the first resonant bending mode for a rotating shaft should reside beyond the maximum spindle rotating frequency. This arises from the observation that as spindle speed approaches its resonant frequency, resonance can be excited and spindle performance will be affected, often to the point of failure.

Hitherto this problem has usually been avoided by arranging that the resonant frequency of the spindle is as high as possible. Conventionally this has been achieved by using shafts which are short in axial length and have as large a diameter as is practical.

This is the very antithesis of the requirements for a grinding wheel spindle which is adapted to grind re-entrant cam profiles.

Summary of Invention

According to the present invention there is provided a spindle for a grinding wheel which is to grind re-entrant cams on camshafts comprising a drive motor, a shaft extending from the motor at the end of which is mounted a grinding wheel, and a rigid elongate casing extending from the motor and encasing the shaft, wherein the length of the shaft and casing is selected to be at least as long as the axial length of cam shafts to be ground by the wheel, the shaft is carried in three bearings each of which is a hydrostatic bearing, and one of the bearings is located near the end of the shaft carrying the grinding wheel so as to be at the end of the rigid casing remote from the motor, thereby to increase the shaft stiffness and increase its resistance to bending.

A second bearing may be located at the inboard end of the external part of the shaft, and the third bearing is located within the motor at the said other end of the shaft.

Typically the shaft is constructed so as to have at least two different diameters, and that part of the shaft which extends within the motor has a greater diameter than does that part of the shaft which extends axially externally therefrom.

The grinding wheel is preferably demountably fixed to the shaft.

The motor is usually an electric motor, and the stator of the motor is preferably secured within a rigid housing.

The non-rotating element of each of the three bearings is preferably secured within either the rigid elongate casing or the rigid motor housing.

According to a preferred aspect of the invention the axial length of the rotor-bearing part of the shaft is shorter than the external part of the shaft, and the shaft is constructed so that the stiffness and the support of the shorter part of the shaft situated between the second and third bearings dictate that the bending resonance of the longer external part is above the critical spindle rotational frequency

Preferably a symmetrical design of housing is employed for the motor.

As already stated, traditionally a grinding wheel spindle shaft has only been supported by two bearings and therefore bearing alignment has not been an issue. However, if three bearings are to be employed, alignment of the three bearings is very important. Where hydrostatic bearings are involved this is a very real problem since typically hydrostatic bearings have radial clearances (and therefore an oil film thickness) of the order of 25 microns, and if vibration is not to be introduced due to misalignment, any adjustment mechanism to achieve alignment needs to be capable of microscopic movements much smaller than the hydrostatic film thickness.

According therefore to another aspect of the present invention, during assembly the internal bores of two of the bearings are initially aligned and then the third bearing is then adjusted radially to bring all three bores into alignment.

However, alignment of the bearings is not restricted to ensuring their alignment during assembly, since at the high speeds required of grinding processes using small wheels, considerable heat can be generated within the bearings, and the spindle can also become heated by heat from the grinding wheel at one end and the electric motor (when under load) at the other end. This can result in variations in the spindle temperature in a non-axisymmetrical manner, resulting in bending due to differential thermal expansion taking place. This can result in misalignment of the spindle shaft and the bearings. This is particularly the case if the differential thermal expansion is occurring in different radial regions of the spindle structure.

Using a symmetrical design of housing for the motor assists

Preferably the motor housing includes a water cooling jacket in which water is forced to follow a helical path around the motor, so as to avoid cooling one side of the motor more than another.

Preferably the spindle is constructed to be axisymmetrical, so that any heat generated within the bearings dissipates radially into the surrounding material in a uniform manner, so that in use the spindle housing will tend to warm up and cool down uniformly, and therefore expand and contract uniformly.

In use, oil is supplied under pressure hydrostatic to the bearings by a pump which draws oil from a reservoir to which oil returns from the bearings the oil becomes heated in each bearing and the heated oil drains into lower regions of the enclosure formed by the rigid elongate shaft casing and the motor housing. As a result the lower regions of the enclosure can become heated in use to a higher temperature than the upper regions thereof

This can result in bending and distortion of the spindle housing which again can cause misalignment of the bearings and can impart a strain on the spindle shaft.

In order to overcome the potential for distortion due to a hot zone being created in the lower regions of the spindle housing the lower regions of the enclosure are preferably formed as a separate oil collection box which is mounted to the remainder of the enclosure in such a manner that it will not impart a strain on the spindle shaft.

In order to reduce the transfer of heat to the bearings and upper regions of the enclosure a thermal barrier may be provided between the said lower regions and the remainder of the enclosure to reduce the transfer of heat from the hot oil to the upper regions of the enclosure and thereby prevent thermally induced misalignment of the three bearings and any strain on the spindle shaft caused by any such misalignment.

The invention will now be described by way of example with reference to the accompanying drawings in which:-

Figs 1 (a) and (b) illustrate how conventional profile and re-entrant profile cam can be ground,

Fig 2 illustrates how the spindle shaft diameter is restricted where the workpiece contains regions of differing radial extent as in the case of cams along an engine camshaft,

Fig 3 illustrates the axial space required for camshaft clearance,

Fig 4 illustrates diagrammatically how the spindle shaft can be supported by three bearings (instead of the conventional two),

Fig 5 illustrates diagrammatically how cooling fluid can be made to flow in a helical path around the spindle drive motor and,

Fig 6 shows how oil leaves a hydrostatic bearing.

As shown in Fig 1 (a) a conventional cam profile 10 which contains no re-entrant (concave curvature) region can be ground using a relatively large diameter grinding wheel 12. Where (as is usual) the wheel diameter is considerably greater than the diameter of the spindle and drive motor, the wheel can be positioned anywhere along the length of a camshaft workpiece without there being any risk that the spindle or motor will be engaged by any part of a rotating cam.

The situation is rather different when grinding re-entrant cam profiles such as shown in Fig 1 (b). Here the diameter of the grinding wheel 14 must be such that it can enter the region of "concave" curvature 16,18 around the profile 20, to grind each curved face without simultaneously grinding away adjoining larger radiused regions of the profile – as would occur if a larger diameter wheel (such as 12 in Fig 1 (a)) were to be used.

It has been proposed to use two grinding wheels and to grind re-entrant profiles such as 20, by first using a larger wheel such as in Fig 1 (a) to form a non re-entrant profile (or partly re-entrant to the extent that the diameter of the larger wheel will allow) and then to use a smaller wheel such as shown in Fig 1(b) to grind the re-entrant (concave) regions 16, 18.

However, this presents problems where there is a requirement for significantly smaller radius re-entrance as has been a feature of such cams during the last 5 years or so. Conformed radius of 50mm have been a standard required and latterly there is a requirement for radius as small as 10mm cams. Correspondingly smaller diameter wheels therefore have to be employed. The problem is demonstrated in Fig 2, which shows how the cams do not all protrude in the one radial direction from the camshaft, and the base circle region 22 of one cam 23 can coincide with the tip 24 of another cam 25, albeit axially distant from the former. The wheel diameter is denoted by 26 and the wheel is

shown mounted on a shaft 27. The diameter of the wheel is such as to be capable of grinding the desired radius of curvature of the re-entrancy in the cam lobe.

In order to follow the cam lobe surface as the camshaft rotates about its axis 28, the wheel axis 30 has to move towards and away from the camshaft axis 28 during the grinding process, typically under computer control in manner known per se. This is achieved by moving the wheelhead 32 in the forward and backward directions indicated by arrow 34. However, as will be seen with particular reference to Fig 3, when the wheelhead 32 has moved to the right in Fig 2, so that the wheel 26 can grind the base circle region 22 of a cam 23, it is important that the spindle housing 36 surrounding the shaft 27 does not interfere with the tips of other cams such as tip 24 of cam 25 in Fig 2. This puts a constraint on the cross section size of the spindle housing 36.

Fig 3 shows the drive motor housing 38 which is larger in diameter than the spindle housing 36. This demonstrates that the spindle needs to extend axially to the left of the drive motor housing 38 by at least the axial length of the camshaft 40, so that the housing 38 will not interfere with the rotating cams. The spindle shaft 27 therefore has to be much longer than the case where the wheel diameter is significantly greater than that of the spindle housing 36 and drive motor housing 38. (It will be appreciated that where a larger diameter wheel is involved the shaft 27 need only protrude from the drive motor housing 38 by a sufficient length to allow the wheel to be mounted thereon). Since the spindle shaft 27 now needs to be as long as the workpiece 40, and the spindle and shaft are constrained in diameter for the reasons given above, the invention proposes the use of the third bearing as shown in Fig 4, so as to stiffen the shaft.

In Fig 4 the rotor 40 can be seen mounted on, or formed integrally with, part of the spindle shaft 27 and the small diameter grinding wheel 26 is shown mounted on the extreme left hand (outboard) end of the shaft. The latter is supported by three hydrostatic bearings 44,46,48. The bearings 44 and 46 are located at opposite ends of the rotor 40 and the outer race of bearing 44 is mounted within the right hand end of the housing 38 which houses the stator (not shown) of the motor.

The bearing 48 is located adjacent to the grinding wheel while bearings 44 and 46 are positioned either side of the rotor 40,

The outer race of bearing 48 is secured within the spindle body 36 while the outer race of bearing 46 is located at the interface between the spindle body 36 and the motor housing 38, and also forms the location reference between the two.

During manufacture two of the bearings are first aligned, and then the third bearing is adjusted radially so as to accurately align with the other two bearings, so that the shaft 27 runs true.

To facilitate a comparison of Figs 3 and 4 the housings 36, 38 are shown in dotted outline in Fig 4

More detail of the motor is shown in Fig 5 which shows the shaft 27, rotor 40, stator 50 and housing 38. Around the stator is a cylindrical coolant jacket 52 through which cooling liquid (typically water) is caused to flow from an inlet 54 to an outlet 56. In so doing it is forced to traverse a helical path denoted in dotted outline at 58, so that there is no short straight path between inlet and outlet. In this way heat is removed in a generally uniform manner from the stator 50 and the housing 38 and no one region of the housing or stator should become hotter than any other region thereof.

Fig 6 shows how an oil collection chamber 60 can be fitted below a hydrostatic bearing housing 62 so as to collect oil under gravity as it leaves the bearing. By incorporating a seal 64 composed of poor thermal material between the chamber 60 and the housing 62, to form a thermal break, so any heat contained in the oil will not heat up the lower part of the housing 62 relative to the upper part thereof, as could otherwise happen, resulting in possible distortion of the housing 62. Oil leaves the chamber 60 via passage 66 to return to a reservoir (not shown) which may include an oil cooler.

C739/W

CLAIMS

1. A spindle for a grinding wheel which is to grind re-entrant cams on camshafts comprising a drive motor, a shaft extending from the motor at the end of which is mounted a grinding wheel, and a rigid elongate casing extending from the motor and encasing the shaft, wherein the length of the shaft and casing is selected to be at least as long as the axial length of cam shafts to be ground by the wheel, the shaft is carried in three bearings each of which is a hydrostatic bearing, and one of the bearings is located near the end of the shaft carrying the grinding wheel so as to be at the end of the rigid casing remote from the motor, thereby to increase the shaft stiffness and increase its resistance to bending.
2. A spindle as claimed in claim 1 wherein a second bearing is located at the inboard end of the external part of the shaft, and the third bearing is located within the motor at the said other end of the shaft.
3. A spindle as claimed in claim 1 or 2 wherein the shaft is constructed so as to have at least two different diameters, and that part of the shaft which extends within the motor has a greater diameter than does that part of the shaft which extends axially externally therefrom.
4. A spindle as claimed in any of claims 1 to 3 wherein the grinding wheel, is demountably fixed to the shaft.
5. A spindle as claimed in any of claims 1 to 4 wherein the motor is an electric motor.

6. A spindle as claimed in claim 5 wherein the stator of the motor is secured within a rigid housing and the non-rotating element of each of the three bearings is secured within either the rigid elongate casing or the rigid motor housing.
7. A spindle as claimed in claim 5 or 6 wherein the axial length of the rotor-bearing part of the shaft is shorter than the external part of the shaft, and the shaft is constructed so that the stiffness and the support of the shorter part of the shaft situated between the second and third bearings dictate that the bending resonance of the longer external part is above the critical spindle rotational frequency
8. A spindle as claimed in any of claims 5 to 7 in which a symmetrical design of housing is employed for the motor.
9. A spindle as claimed in claim 8 wherein the motor housing includes a water cooling jacket in which water is forced to follow a helical path around the motor, so as to avoid cooling one side of the motor more than another,
10. A spindle as claimed in any of claims 1 to 9 wherein the spindle is constructed to be axisymmetrical, so that any heat generated within the bearings dissipates radially into the surrounding material in a uniform manner, so that in use the spindle housing will tend to warm up and cool down uniformly, and therefore expand and contract uniformly.
11. A spindle as claimed in any of claims 1 to 10 in which, in use, oil is supplied under pressure to the bearings by a pump which draws oil from a reservoir to which oil returns from the bearings.
12. A spindle as claimed in claim 11 wherein the oil is heated in each bearing and the heated oil drains into lower regions of the enclosure formed by the rigid elongate shaft casing and the motor housing, and the lower regions of the enclosure thereby can become heated in use to a higher temperature than the upper regions thereof

13. A spindle as claimed in claim 12 wherein the lower regions of the enclosure are formed as a separate oil collection box which is mounted to the remainder of the enclosure in such a manner that it will not impart a strain on the spindle shaft.
14. A spindle as claimed in claim 12 and 13 wherein a thermal barrier is provided between the said lower regions and the remainder of the enclosure to reduce the transfer of heat from the hot oil to the upper regions of the enclosure and thereby prevent thermally induced misalignment of the three bearings and any strain on the spindle shaft caused by any such misalignment.
15. A method of constructing a spindle as claimed in claim 1 wherein during assembly the internal bores of two of the bearings are initially aligned and the third bearing is adjusted radially to bring all three bores into alignment.
16. A spindle constructed arranged and adapted to operate as described therein and with reference to the accompanying drawings.

C739/W

ABSTRACT

A spindle for a grinding wheel which is to grind re-entrant cams on camshafts is described, comprising a drive motor, a shaft extending from the motor at the end of which is mounted a grinding wheel, and a rigid elongate casing extending from the motor and encasing the shaft. The length of the shaft and casing is selected to be at least as long as the axial length of cam shafts to be ground by the wheel. The shaft is carried in three hydrostatic bearings. One bearing is located near the grinding wheel at the end of the rigid casing remote from the motor. The assembly increases the shaft stiffness and its resistance to bending. A second bearing is located at the inboard end of the shaft and the third bearing is located within the motor at the far end of the shaft. The length of the rotor-bearing part is shorter than the external part of the shaft, which is constructed so that the stiffness and the support of the shorter part of the shaft dictate that the bending resonance of the longer external part is above the critical spindle rotational frequency. The motor housing is symmetrical and includes a water cooling jacket in which water follows a helical path around the motor, to avoid cooling one side of the motor more than another. The spindle is constructed to be axisymmetrical, so that any heat generated within the bearings dissipates radially and uniformly into the surrounding material. Oil is supplied under pressure to the bearings by a pump from a reservoir to which oil returns from the bearings. The oil is heated in each bearing and the heated oil drains into lower regions of the enclosure formed by the shaft casing and motor housing. The lower regions of this enclosure constitute a separate oil collection box mounted so as not to strain the shaft. A thermal barrier is provided between the upper and lower regions of the enclosure. During assembly the internal bores of two of the bearings are initially aligned and the third bearing is adjusted radially to bring all three bores into alignment.

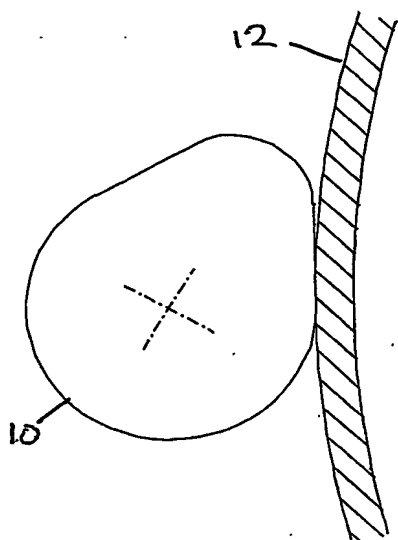


Fig 1(a)

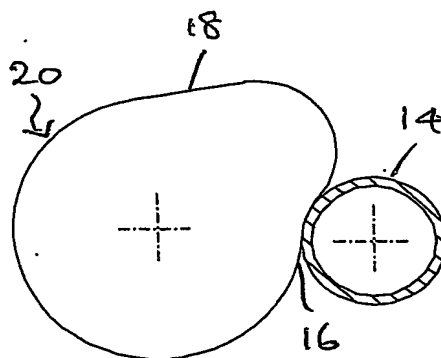


Fig 1(b)

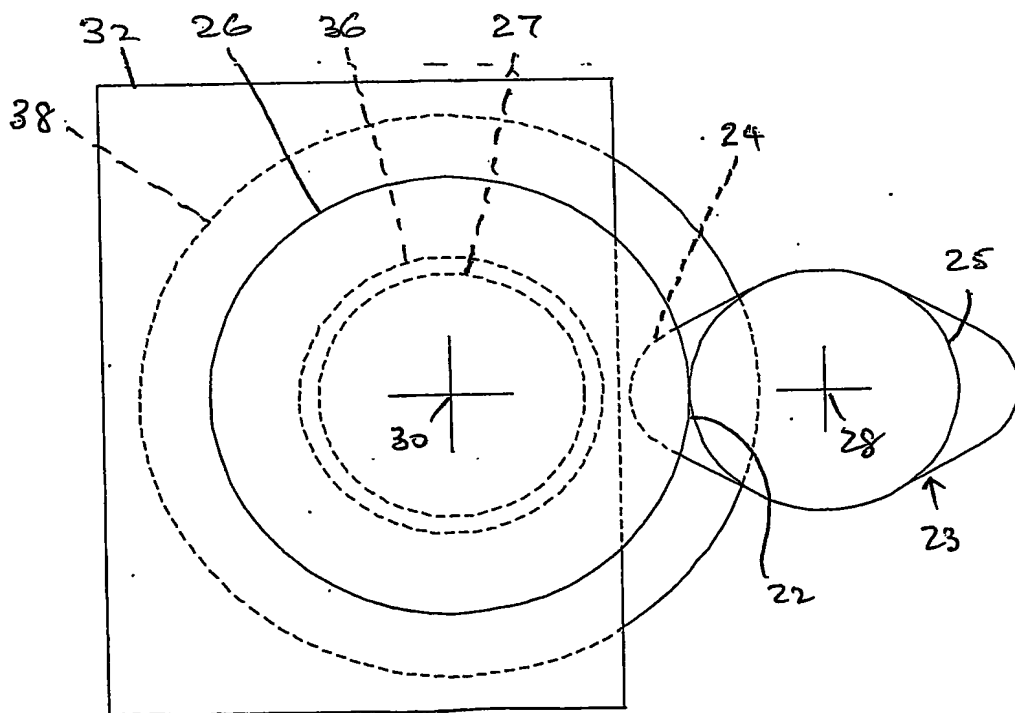



Fig 2



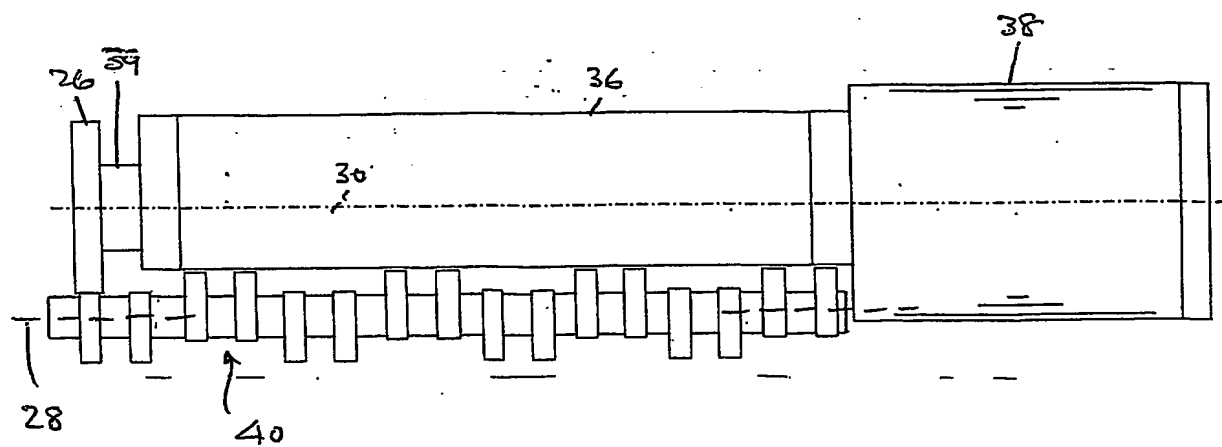


Fig 3

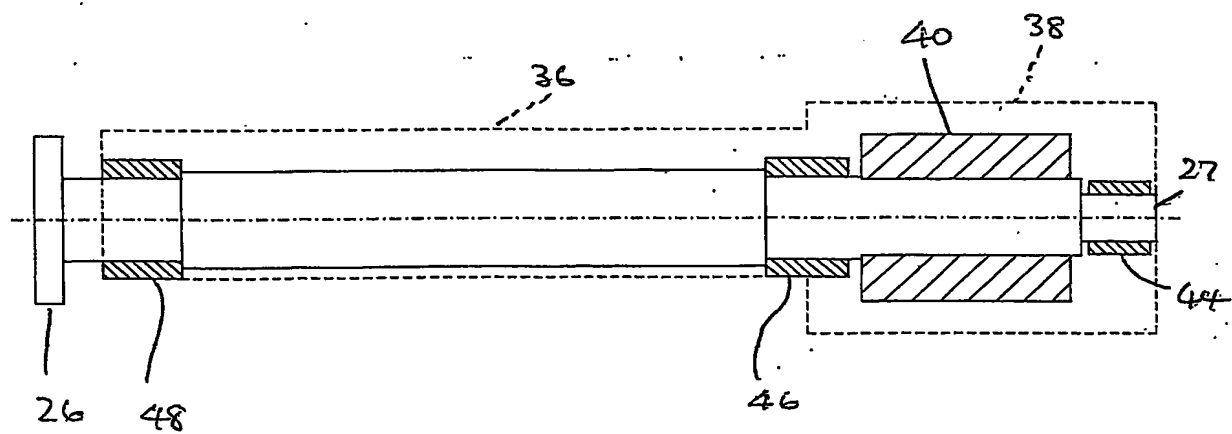


Fig 4

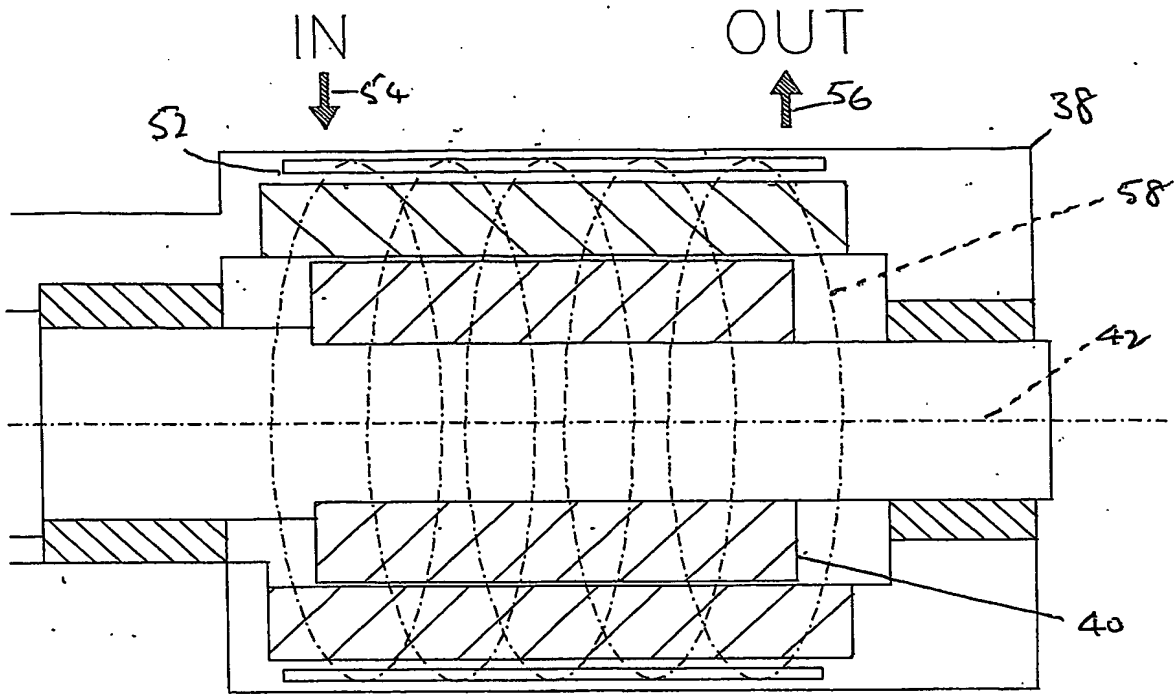


Fig 5

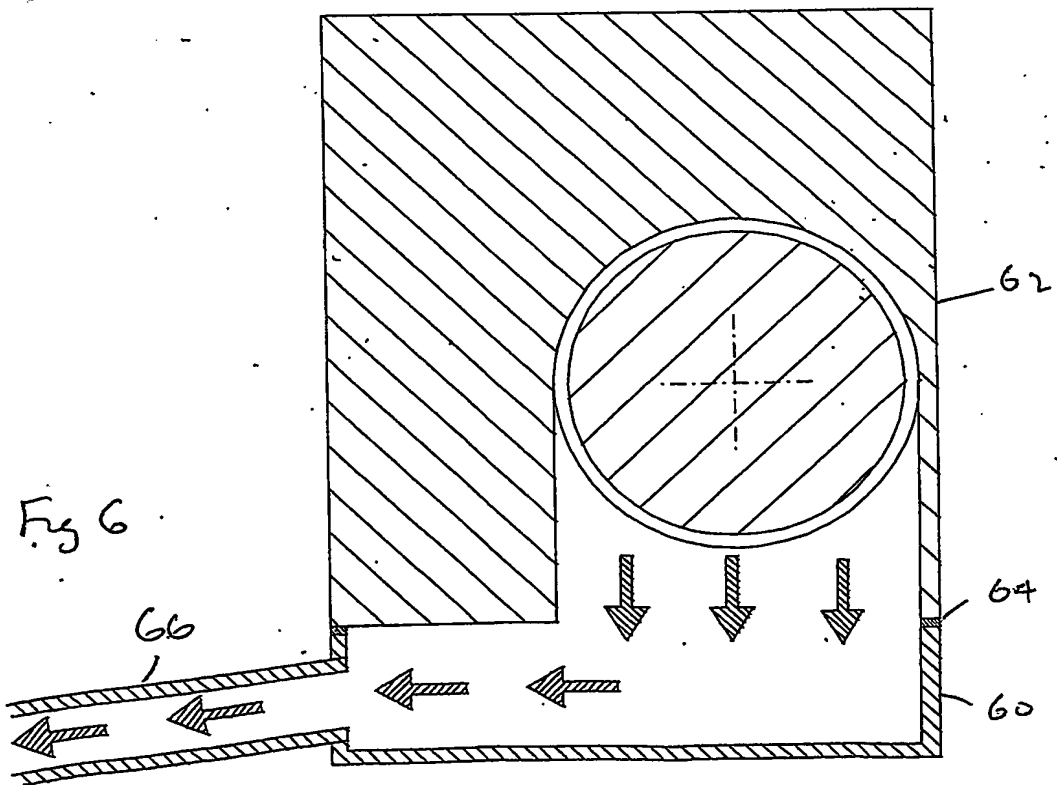


Fig 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.